



DT-25

Pressure Sensitive Detector For Geophysical Exploration

Natural Frequency (± 15%)	10 Hz
Voltage Sensitivity (± 1.5dB)	11.2 volts/bar 14 volts/bar
DC Resistance (± 10%)	160 ohms
Operating Temperature	0–35°C
Operational Depth	1m–76 m
Standard Cable Sizes	0.310 in(0.79cm)
Polarity	SEG
Dimensions	without outer case
Length	12.4 cm
Diameter	5.3 cm
Weight	400g (with one meter cable)
Limited Warranty Period	6 months

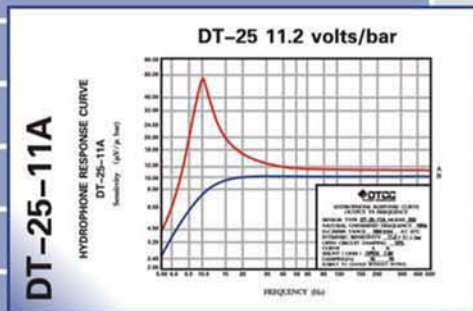

P/N: 610211

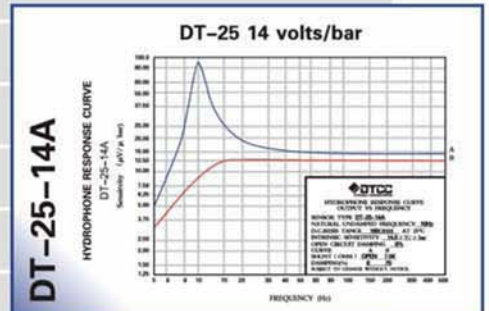

P/N: 610209

NOTE:
Voltage Sensitivity could be adjusted as customer required.
All parameters are specified at +25°C

Warranty:
Warranty excludes damage caused by high voltage and physical damage to the element case.

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.